


Daikin VRV SYSTEMS Compatibility List

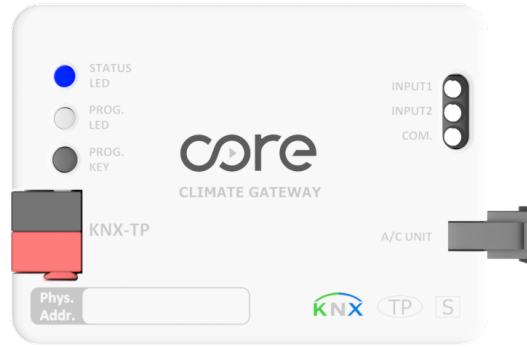

Document Version: 2.1

Last Updated: 28.04.2022

Device Version: 1.1

Device Model: CR-CG-DK-KNX-01

1. INTRODUCTION

In this document, compatible Daikin VRV indoor unit models with Core Daikin VRV Gateway (CR-CG-DK-KNX-01) are specified.



Any AC indoor unit not specified in the list may not be compatible with Core AC Gateway. Therefore compatibility list must be checked before installation.



Any remote controller not specified in the list may not be compatible with Core AC Gateway. Therefore compatibility list must be checked before installation.



We highly recommend to pay attention to the possible updates of this document in case of any misprint, typing error and equivalent problems.



Core Smart Home undertakes maximum effort to avoid any error in the content of this document but cannot be responsible for the consequences that could arise because of any mistake in the document.

2. COMPATIBLE AC INDOOR UNITS

INDOOR UNIT TYPE	VRV LINE INDOOR UNIT MODEL
Ceiling Mounted Cassette 2-Way	FXCQ xx FXYC xx
Ceiling Mounted Cassette 4-Way	FXZA xx FXZQ xx FXYF xx
Ceiling Mounted Cassette Corner	FXKQ xx FXYK xx
Ceiling Suspended Unit 4-Way	FXUQ xx
Ceiling Mounted Cassette Round Flow	FXFA xx FXEQ xx FXFQ xx FXFSQ xx
Ceiling Suspended Unit	FXHQ xx FXYH xx
Ceiling Mounted Build-In	FXTQ xx
Ceiling Concealed Unit Slim	FXDA xx FXDQ xx
Ceiling Concealed Unit	FHEYB xx FXYB xx FXYM xx FXYS xx FXYSP xx
Ceiling Concealed Unit Large	FXMQ xx
Ceiling Concealed Unit Inverter Driven	FXSA xx FXSQ xx
Floor Standing Unit Without Casing	FXNQ xx FXLQ xx
Floor Standing Unit With Casing	FXYL xx FXYLM xx
Wall Mounted Unit	FXAA xx FXAQ xx FXYA xx
Air Curtain	CAS xx



XX stands for power of the indoor unit.

3. COMPATIBLE REMOTE CONTROLLERS

WIRED REMOTE CONTROLLERS WORK WITH CORE DAKIN KNX GATEWAY ON THE SAME BUS	
	BRC1A52
	BRC1D52
	BRC1E51A
	BRC1E52
	BRC1E52A
	BRC1E52B
	BRC1E53A
	BRC1E53B
	BRC1E53C
	BRC1E63
	BRC1E73
	BRC1H519
	BRC1H519W
	BRC1H52
	BRC1H52W

4. INSTALLATION SCENARIOS

INSTALLATION WITH DAIKIN WIRED REMOTE CONTROLLERS

Connect Core AC Gateway parallel with Daikin wired remote controllers. In this method, Daikin Wall controller should be programmed as master, while Core AC Gateway programmed as slave.

INSTALLATION WITHOUT DAIKIN WIRED REMOTE CONTROLLERS

Connect Core AC Gateway directly to the P1,P2 connectors of the Daikin indoor unit. In this scenario, Core AC Gateway should be programmed as Master.