


Technical Specification

Dimensions (Frame):	86mm X 125mm X 8mm
Dimensions (Electronic Part):	41mm X 61mm X 20mm
Casing Material:	Aluminium, Brass, Nickel, Copper and Aged Brass depending on the finish selection
Power:	30 VDC - from KNX Bus Line
Consumption:	< 12 mA from KNX Bus-line
Connectivity:	KNX-TP
Programming Tool:	ETS
Installation:	Italian Standard In Wall Box, 3M size and more
Operating Temperature:	0°C / +45°C
Storage Temperature:	-10°C / +55°C
Relative Humidity:	95% not condensing
Certification:	Device complies with Electromagnetic Compatibility Directive(2014/30/EU). Tests carried out according to EN55032:2015 and EN55035:2017.

Dimensional drawing (all dimensions are in mm)

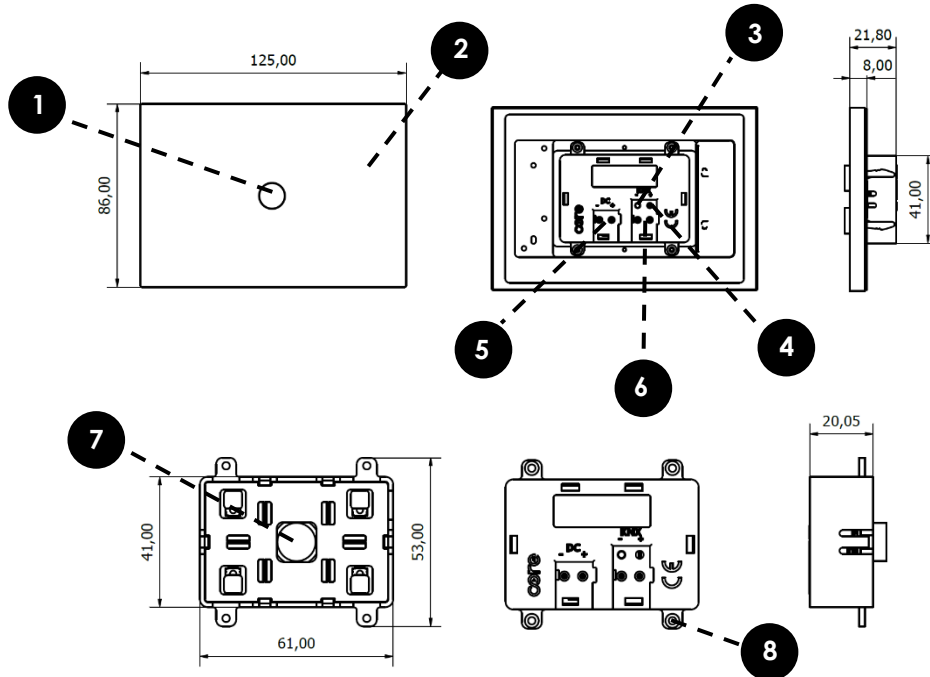

- | | |
|--|---|
| 1. Button Metal Part (Sold Separately) | 5. Auxiliary Power Connector (Not used) |
| 2. Frame (Sold Separately) | 6. KNX Connector |
| 3. KNX Programming Button | 7. Button with RGB Led |
| 4. KNX Programming Led | 8. Screw Holes |